



IHC2150A

2000 MHz – 2300 MHz HYBRID COUPLER, 90 DGREE, 10 W

REV A
March 2014

Key Features



- Wide Band, 2000 MHz ~ 2300 MHz
- Low Insertion Loss, 0.25 dB Typ.
- High Isolation, 20 dB min
- Excellent VSWR 1.22:1 Typ.
- 90 Degree Hybrid, SMA Connector
- Build-in DC Block Capacitors
- Precision Machined Housing
- Meet MIL-STD-202g

Applications

- Balance Wide Band Power Amplifier
- PCS, 3G, ISM Bands
- RF Bench Tests
- Wireless Applications



Absolute Maximum Ratings

Parameters	Units	Ratings
Input Power(at Port 1) CW	W	10
Storage Temperature	°C	-40 ~ +85
Operating Temperature	°C	-40 ~ +85


Operation of this device beyond any one of these parameters may cause permanent damage.

Specifications


Summary of the key electrical specifications at 25°C

Index	Testing Item	Symbol	Test Constraints	Min	Typ	Max	Unit
1	Frequency Range	BW	50 Ohm Impedance	2000		2300	MHz
2	Insertion Loss	S_{21}	2000 – 2300 MHz, above 3 dB		0.25	0.5	dB
3	VSWR	SWR_i	2000 – 2300 MHz, all Ports		1.22:1	1.5:1	Ratio
4	Isolation	S_{23}	2000 – 2300 MHz, 50 Ohm Load at Port C	20	23		dB
5	Amplitude Unbalance	$S_{21} - S_{31}$	2000 – 2300 MHz			1.0	dB
6	Phase Offset	$S_{21} - S_{31}$	2000 – 2300 MHz	87	90	93	Deg
7	Power Handling	P_{MAX}	2000 – 2300 MHz, CW			10	W
8	Operating Temperature	T_o		-40		+85	°C

Functional Block Diagram

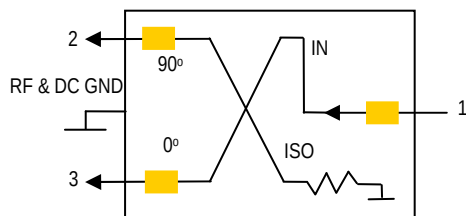

Outline, IP-1 Housing

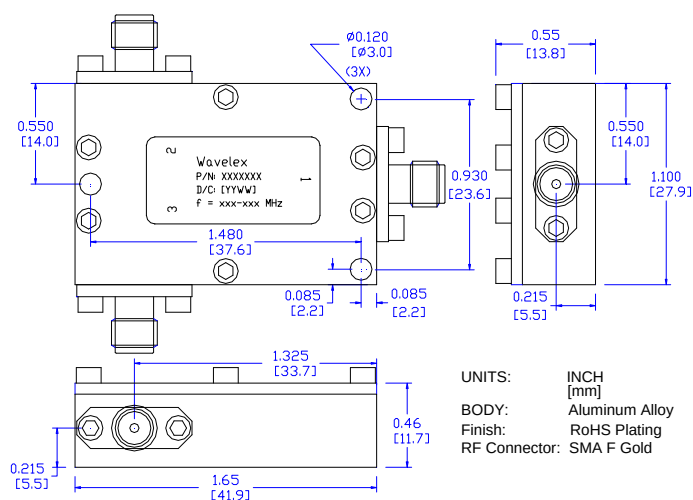

Ordering Information

Model Number	Connectors	
	IN	OUT
IHC2150A	SMA Female	SMA Female

Specifications and information are subject to change without notice.







IHC2150A

2000 MHz – 2300 MHz HYBRID COUPLER, 90 DGREE, 10 W

REV A
March 2014

Typical Data

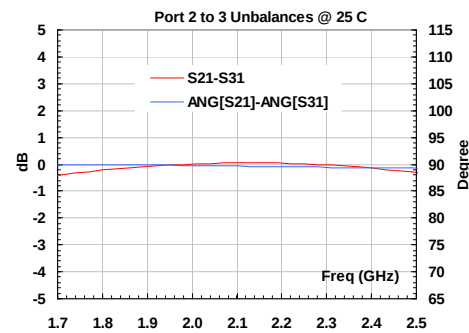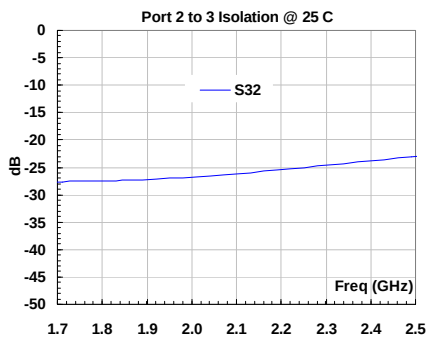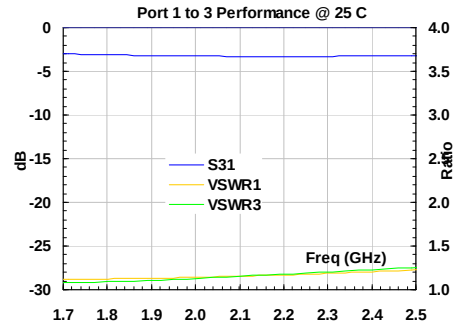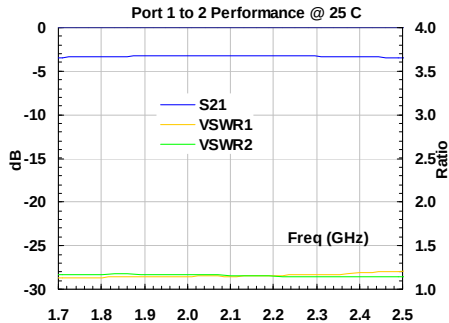

Application Notes:

A. SMA Torque Wrench Selection

Always use a torque wrench with 5 ~ 6 inch-lb coupling torque setting for mating the SMA cables to the amplifier. Never use torque more than 8 inch-lb wrench for tightening the mating cable to the connector. Otherwise, the permanent damage will occur to the SMA connectors of the amplifier. 8710-1582 (5 inch-lb) is one of the ideal torque wrench choice from Agilent Technology.

B. Mounting the Amplifier

Use three pieces of #2-56 with longer than 9/16" screws for mounting the amplifier on a metal-based chase. Flat and spring washers are needed to prevent the screw loosening during the shock and vibration. Always use the appropriate torque setting of the power screwdriver to mount them.

Specifications and information are subject to change without notice.

Infiniti Microwave Inc. Tel: +86 591 87812519

Fax: +86 591 87303613

E-mail: sales@infinitimw.com

Website: www.infinitimw.com